
TUSIL® MARINE

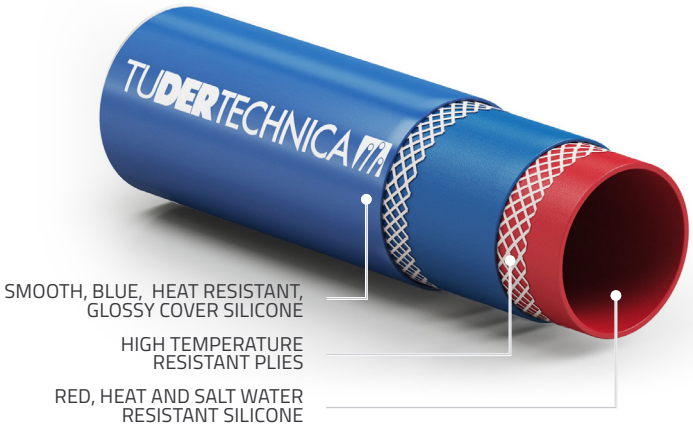

Used as straight connections in the wet exhaust system and engine water circulation lines.

DESCRIPTION

Tube
silicone red, heat and salt water resistant

Reinforcement
high temperature resistant plies

Cover
smooth, blue silicone rubber, glossy. Heat, ageing, ozone and paraffin oil resistant

Marking
TUDERTECHNICA TUSIL® MARINE

TECHNICAL CHARACTERISTICS

Temperature range : -60°C / +200°C (-76°F / +392°F)
The operating temperature of the hose is directly dependent upon the specific fluid been conveyed and the length of time the fluid is in contact with the hose.

Norm : SAE J2006 TYPE R1; ISO 13363:2004 Type 1 class B; ISO 1307 for dimensional tolerances

Inside diameter		Outside diameter		Length		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[mt]	[ft]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
19	0,75	28	1,10	40	130	13	195	39	585	0,40	0,27	-	-
25	1,00	34	1,34	40	130	10	150	30	450	0,50	0,34	-	-
28	1,10	37	1,46	40	130	10	150	30	450	0,55	0,37	-	-
32	1,25	41	1,61	40	130	8	120	24	360	0,62	0,42	-	-
35	1,38	44	1,73	40	130	8	120	24	360	0,67	0,45	-	-
38	1,50	47	1,85	40	130	7	105	21	315	0,72	0,48	-	-
42	1,65	51	2,00	40	130	7	105	21	315	0,78	0,52	-	-
45	1,77	54	2,13	40	130	6	90	18	270	0,84	0,56	-	-
48	1,90	57	2,24	40	130	6	90	18	270	0,89	0,60	-	-
51	2,00	60	2,36	40	130	5	75	15	225	0,94	0,63	-	-
60	2,36	69	2,72	40	130	5	75	15	225	1,09	0,73	-	-
63,5	2,50	72,5	2,85	40	130	4	60	12	180	1,15	0,77	-	-
67	2,64	76	3,00	40	130	4	60	12	180	1,20	0,80	-	-
70	2,76	79	3,11	40	130	4	60	12	180	1,26	0,84	-	-
73	2,87	82	3,23	40	130	4	60	12	180	1,30	0,87	-	-
76	3,00	85	3,35	40	130	4	60	12	180	1,36	0,91	-	-
90	3,54	99	3,90	40	130	3	45	9	135	1,59	1,07	-	-
102	4,00	111	4,37	40	130	3	45	9	135	1,80	1,21	-	-
114	4,49	123	4,84	40	130	2	30	6	90	1,99	1,33	-	-
127	5,00	136	5,35	40	130	2	30	6	90	2,22	1,49	-	-
140	5,51	149	5,87	12	39	2	30	6	90	2,43	1,63	-	-
152	6,00	161	6,34	12	39	2	30	6	90	2,65	1,78	-	-
203	8,00	212	8,35	12	39	1	15	3	45	3,50	2,35	-	-
254	10,00	263	10,35	12	39	1	15	3	45	4,34	2,91	-	-
305	12,00	318	12,52	12	39	1	15	3	45	8,27	5,54	-	-
350	13,78	365	14,37	12	39	1	15	3	45	10,35	6,93	-	-
404	15,91	419	16,50	12	39	1	15	3	45	11,89	7,97	-	-

Data refer to ambient temperature (20°C); we recommend a reduction of 20% working pressure for every 100°C of temperature increase. Other diameters, wall thickness and pressure only on specific request.
We reserve the right to supply in random lengths shorter than 40mt or 20mt.

REV-2021-08-05